Ceiling Bkt
Lights

Des.

A-21

MODERN LIGHTING FIXTURES BY

LIBRARY
MAY 2 1955
U. S. PATENT OFFICE

BULLETIN 53

STERLING INDUSTRIES INC.

U. S. Patent Office
MAY 12 1955
Design Division

- CIRCLINES
- OZONAIRES
- DESK LAMPS
- RECESSED BOXES
- DIRECTIONAL SIGNS

UL

ALL FIXTURES ARE LISTED AND APPROVED BY UNDERWRITERS LABORATORIES, INC. AND/OR CANADIAN STANDARDS ASSOCIATION

U. S. Patent Office
MAY 12 1955
Design Division

RETURN TO
DESIGN DIV.

RECESSED UNITS

HINGED FRAMES

Sterling Recessed and Semi-Recessed Units are quality-built of finest materials and workmanship. Their modern design harmonizes in any surroundings.

BOXES:

- Shallow type — constructed of heavy gauge steel.
- Vented to prevent excessive heat.
- Finished in insulating heat-resistant baked white enamel.

FRAMES:

- Rigid . . . reinforced . . . one-piece — polished chromium finish.
- Reinforcing channel prevents light leakage.
- Continuous type hinge provides easy access for relamping or maintenance.

PANELS: Albalite glass panels by Corning, especially designed for lighting fixtures. Bent glass panels with exclusive new designs that look well in all interiors.

INCANDESCENT

Cat. No.	Frame Size inches	Box Size inches	Depth inches	Lamp Watts
R 288	8 x 8	6¾ x 6¾	4¼	60
R 610	6 x 10	4¾ x 8¾	4¼	60
R 812	8 x 12	6¾ x 10¾	4¼	100
R 210	10 x 10	8¾ x 8¾	4¼	100
R 212	12 x 12	10¾ x 10¾	4¼	150

FLUORESCENT

Cat. No.	Frame Size inches	Box Size inches	Lamp Watts
	REGULAR START		
RF 120	6 x 25¼	4¾ x 24	1 - 20
RF 220	8 x 25¼	6¾ x 24	2 - 20
	INSTANT START		
RF 120 IS	6 x 25¼	4¾ x 24	1 - 20
RF 220 IS	8 x 25¼	6¾ x 24	2 - 20

U. S. Patent Office
MAY 12 1955
Design Division

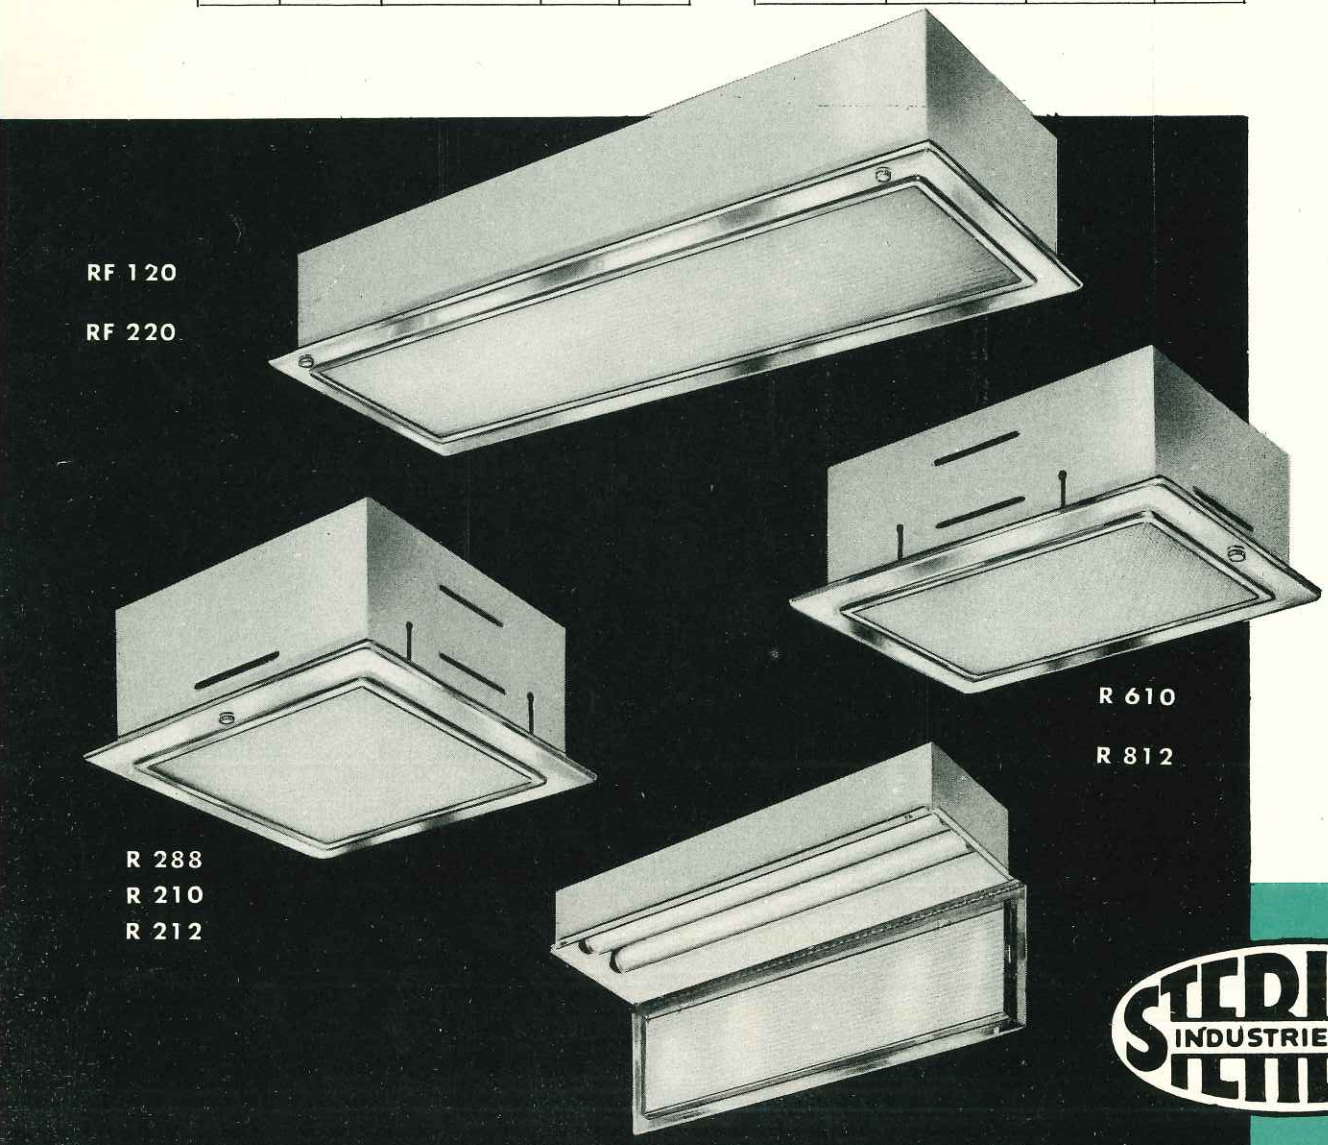

STERLING INDUSTRIES INC.

P. 2

SEMI-RECESSED UNITS

HINGED FRAMES

Unit opened to illustrate polished chromium reflector, continuous piano-type hinge, and reinforcing channel to prevent light leakage.

U. S. Patent Office
MAY 12 1955
Design Division

Bent glass panels with exclusive new designs that look well in all interiors.

INCANDESCENT

Cat. No.	Frame Size inches	Box Size inches	Depth inches	Lamp Watts
RD 288	8 x 8	6¾ x 6¾	4¼	60
RD 610	6 x 10	4¾ x 8¾	4¼	60
RD 812	8 x 12	6¾ x 10¾	4¼	100
RD 210	10 x 10	8¾ x 8¾	4¼	100
RD 212	12 x 12	10¾ x 10¾	4¼	150

FLUORESCENT

REGULAR START

Cat. No.	Frame Size inches	Box Size inches	Lamp Watts
RFD 120	6 x 25¼	4¾ x 24	1 - 20
RFD 220	8 x 25¼	6¾ x 24	2 - 20
	INSTANT START		
RFD 120 IS	6 x 25¼	4¾ x 24	1 - 20
RFD 220 IS	8 x 25¼	6¾ x 24	2 - 20

- Bent-Glass panels illustrated on this page extend 1¼" below ceiling for greater spread of light.
- All Sterling Recessed and Semi-Recessed frames are available in baked white enamel or aluminum finish on request and at no additional charge.

NOTE: *All incandescent fixtures supplied with highly polished chromium reflector for maximum efficiency.*

Manufacturers of Quality Lighting Fixtures

DIRECTIONAL SIGNS

U. S. Patent Office
MAY 12 1955
Design Division

p. 3

SURFACE MOUNTED
700 LINE

Cat. No.	Description	Length inches	Height inches	Depth inches
700	Ladies	14¼	6	3½
701	Men	14¼	6	3½
750	5" Exit	14¼	6	3½
751	6" Exit	14¼	7	3½
752	8" Exit	14¼	9	3½

TWO SIDED PROTRUDING
2700 LINE

Cat. No.	Description	Length inches	Height inches	Width inches
2700	Ladies	14¼	6	3½
2701	Men	14¼	6	3½
2750	5" Exit	14¼	6	3½
2751	6" Exit	14¼	7	3½
2752	8" Exit	14¼	9	3½

Can Be Supplied With One Blank Side If Desired

TWO SIDED HANGING
4700 LINE
COMPLETE WITH 12" STEM AND CANOPY

Cat. No.	Description	Length inches	Height inches	Width inches
4700	Ladies	14¼	6	3½
4701	Men	14¼	6	3½
4750	5" Exit	14¼	6	3½
4751	6" Exit	14¼	7	3½
4752	8" Exit	14¼	9	3½

Can Be Supplied With One Blank Side If Desired

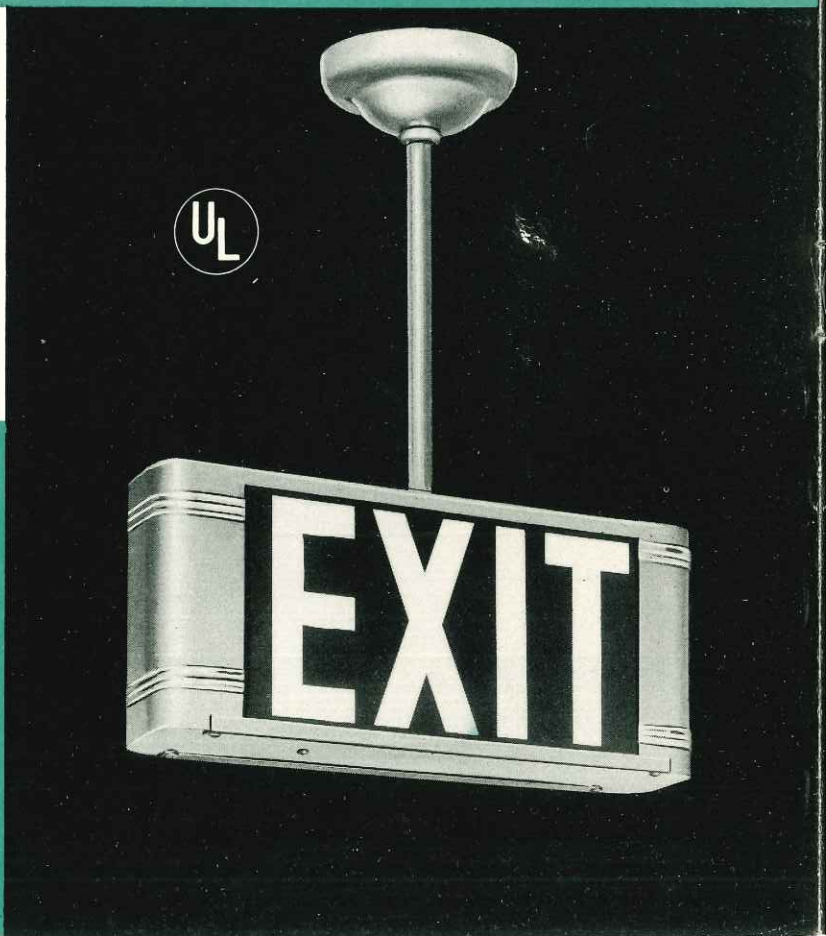

SPECIFICATIONS:

- Fired ceramic glass panels.
- Exit Signs: white letters on red background standard. Also available:
  Red letters on white background.
  Green letters on white background.
  White letters on green background.
- Ladies' and Men's Signs: black letters on white background only.
- Constructed of heavy gauge steel and finished in grey metalescent baked enamel.
- Sliding glass panel for easy relamping.
- Complete with socket—also supplied with two sockets.

DIRECTIONAL SIGNS

U. S. Patent Office
MAY 12 1955
Design Division

Page 4

RECESSED
3700 LINE

Cat. No.	Description	Box Size inches	Depth inches
3700	Ladies	6½ x 11½	3
3701	Men	6½ x 11½	3
3750	5" Exit	6½ x 11½	3
3751	6" Exit	7½ x 11½	3
3752	8" Exit	9½ x 11½	3

Constructed of heavy gauge steel and finished in heat insulating baked white enamel. Frames finished in grey. Fixtures complete with socket. Also supplied with two sockets.

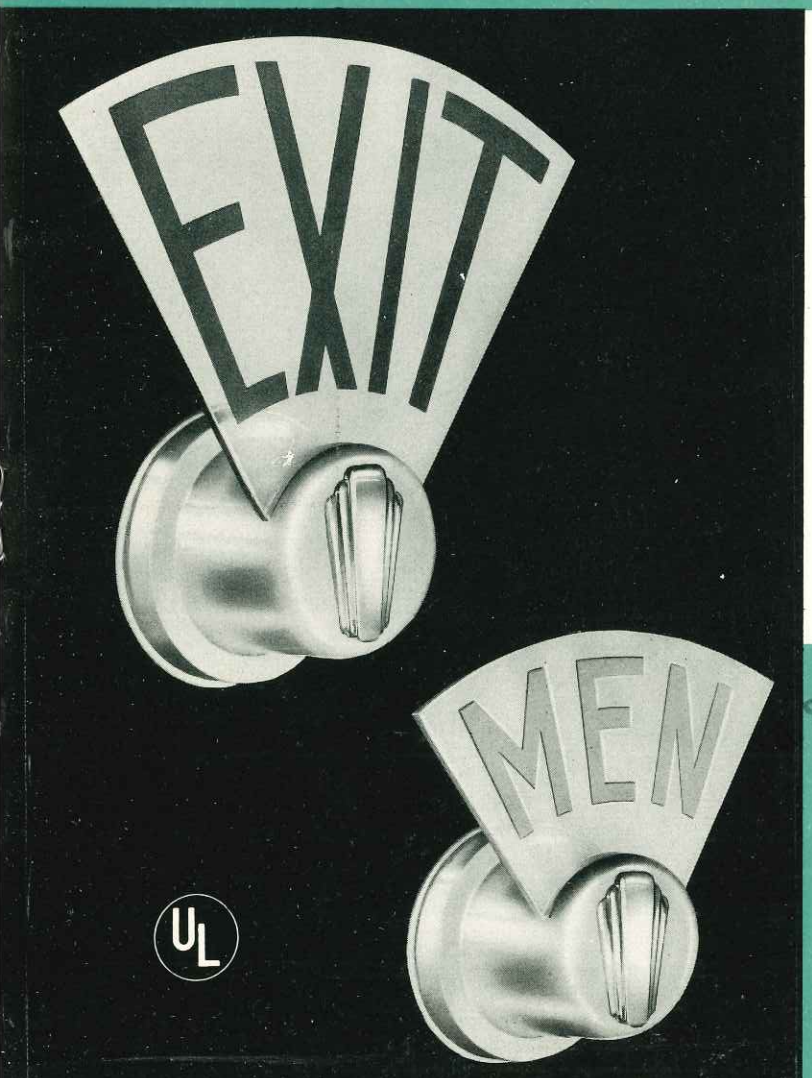

EDGELIGHTED
800 LINE

Cat. No.	Letters
800	Ladies
801	Men
850	5" Exit
851	6" Exit
852	8" Exit

This attractive edge-lighted sign features etched letters on plate glass. The sign base is finished in "metalescent" grey baked enamel with chrome plated ornament. Sign is complete with socket, easy to mount backplate. Special lettering on request.

U. S. Patent Office
MAY 12 1955
Design Division

STERLING INDUSTRIES INC.

CIRCLINE UNITS

ONE LIGHT

626

630

630
Ceramic Shield

626
Ceramic Shield

626
Crystal Glass

630
Crystal Glass

U. S. Patent Office
MAY 12 1955
Design Division

626 LINE

For one 32 watt lamp.

Equipped with permanently mounted socket

Fixture diameter — 12½"

Instant Start or Regular Start

630 LINE

For one 22 watt lamp.

Equipped with permanently mounted socket

Fixture diameter — 8¾"

Instant Start or Regular Start

NOTE: *All Circlines available in baked white enamel or polished chromium finish — please specify.*

Manufacturers of Quality Lighting Fixtures . . . . . .

U. S. Patent Office
MAY 12 1955
Design Division

CIRCLINE UNITS

TWO AND THREE LIGHT

page 6

6400 LINE
For one 32 watt and one 22 watt lamp.
Equipped with permanently mounted sockets.
Fixture diameter — 12½".
Instant Start only.

6600 LINE
For two 32 watt lamps
Fixture diameter — 12½".
Instant Start only.

7200 LINE
For one 40 watt and one 32 watt lamp.
Equipped with permanently mounted sockets.
Overall fixture diameter — 16½".
Instant Start only.
Equipped with backplate and permanently mounted sockets.

9400 LINE
For one 40 watt, one 32 watt and one 22 watt lamp.
Equipped with permanently mounted sockets.
Overall fixture diameter — 16½".
Instant Start only.
Equipped with backplate and permanently mounted sockets.

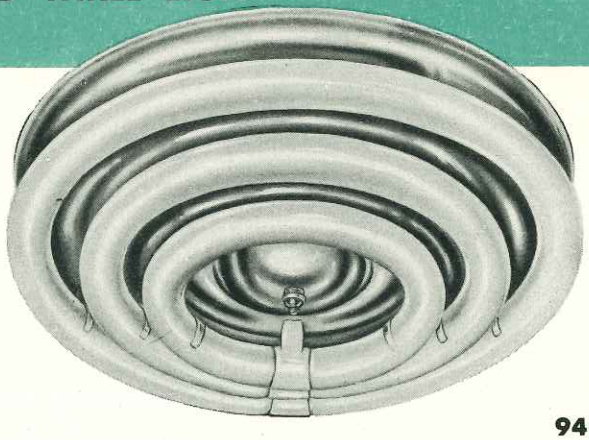

9400

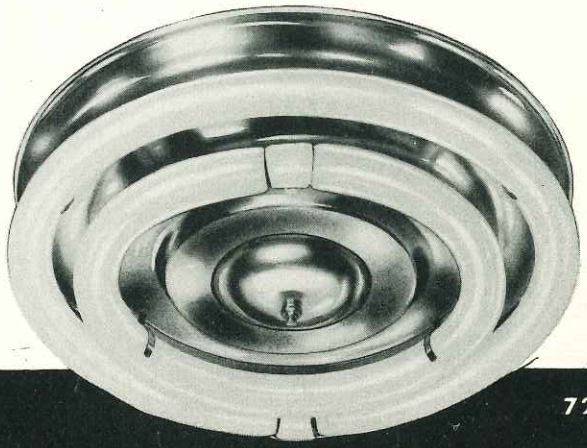

7200

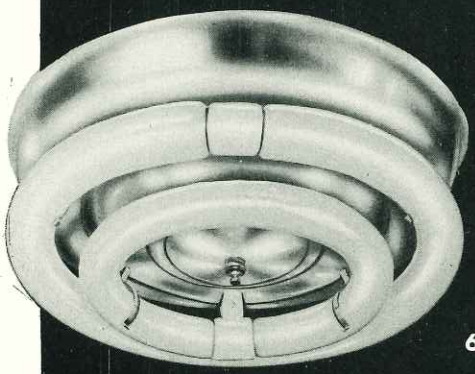

6400

6400
Crystal Glass

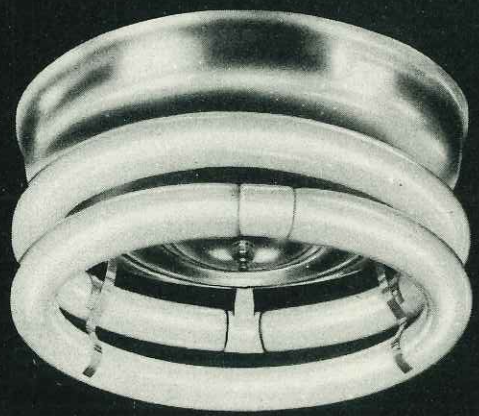

6600

6600
Ceramic Shield

STERLING INDUSTRIES INC.

OZONAIRE®

Equipped with Westinghouse "Odorout" Bulb or the General Electric "Ozone Lamp"

The Sterling Ozonaire banishes most offensive odors and prevents mustiness as it freshens the air. Smartly designed and quality-built, the Ozonaire has proven most effective in Kitchens, Dining Rooms, Offices, Basements, Rest Rooms, anywhere objectionable odors exist.

U. S. Patent Office
MAY 12 1955
Design Division

EXCLUSIVE 3-WAY INSTALLATION:

PIN-UP — hangs on the wall and plugs into any outlet.

PERMANENT MOUNT — remove the cover and fasten back plate to the wall.

CONCEALED WIRING — Knockout provided on back plate.

7¼" high x 4¾" wide, wired for 110 volts, 60 cycle AC complete with 7' cord and plug. Available in handsome silver-grey hammertone or baked white enamel with chrome trim.

Cat. No. 401 for 1 bulb (recommended for up to 1000 cu. ft.)

Cat. No. 402 for 2 bulbs (for areas up to 1800 cut. ft.)

DESK LAMP

for one or two 18" fluorescent tubes.

19¼" long x 11¾" high, the Sterling Desk Lamp is designed to give an abundance of efficient light where needed and to look just right on any desk. Two pencil grooves and paper clip well add to its utility. Constructed of heavy-gauge steel it is available in choice of two attractive finishes: Metalescent deep bronze with satin brass trim, or metalescent grey with satin chrome trim. Wired for 110 volts, 60 cycle AC and equipped with instant-starting two-button on-off switch, 7' Cord and Plug.

Cat. No. DL500 — for 1 tube.

Cat. No. DL520 — for 2 tubes.

U. S. Patent Office
MAY 12 1955
Design Division

Manufactured by

STERLING INDUSTRIES INC.

PHILADELPHIA 34, PA.

PRINTED IN U.S.A.